

# DS-2CC51D3S-VPIR


## 2 MP HD-SDI Outdoor Vandal Proof IR Camera



### Key features

- Full HD1080p video output
- True Day/Night
- Digital WDR, Privacy Masking, Eclipse
- Electronic Image Stabilization (EIS)
- OSD Menu
- IP66 Weatherproof and Vandal Proof

### Dimensions

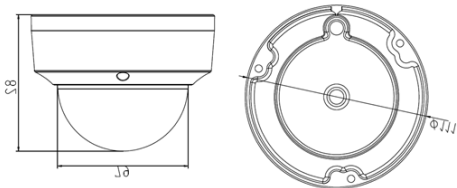

DS-2CC51D3S-VPIR	
<b>Camera</b>	
Image Sensor	1/3" Progressive Scan CMOS
Signal System	PAL /NTSC
Effective Pixels	1920(H)*1080(V)
Min. Illumination	0.01 Lux @(F1.2,AGC ON) 0 Lux With IR
Shutter Time	1/25 s to 1/50,000 s
Lens Mount	M12
Lens	3.6mm @ F1.8(6mm optional) Angle of View: 77°(3.6mm), 46°(6mm)
Day & Night	ICR
Synchronization	Internal synchronization
WDR	Digital WDR
Video Frame Rate	PAL: 1080p@25fps NTSC: 1080p@30fps
HD Video Output	SMPT292M (HD-SDI)
SD Video Output	1Vp-p Composite Output(75Ω /RCA)
S /N Ratio	Over 52dB
<b>Menu</b>	
Camera ID	On /off (15 characters, position programmable)
AGC	Support
Color Mode	Auto /color /black and white
White Balance	AWC-SET, indoor, outdoor, manual white balance, auto white balance
Privacy Masking	On /off, up to 8 zones
Motion Detection	On /off, up to 3 zones
BLC	Support
Anti-flicker	On /off
Language	Chinese /English
Functions	Eclipse, Digital noise reduction, Digital zoom(64x), Slow shutter, ePTZ, Mirror, PIP, Demist, Defect pixel correction
<b>General</b>	
Operating Conditions	-10 °C - 60 °C (14 °F - 140 °F), Humidity 90% or less (non-condensing)
Power Supply	12 V DC ± 10%
Power Consumption	3W MAX (Max. 5W with ICR on)
Weatherproof Ratings	IP66
IR Range	10-20 m
Dimension	61 ×61× 155 mm
Weight	450g

### Available models

DS-2CC51D3S-VPIR